

FIG. 1A

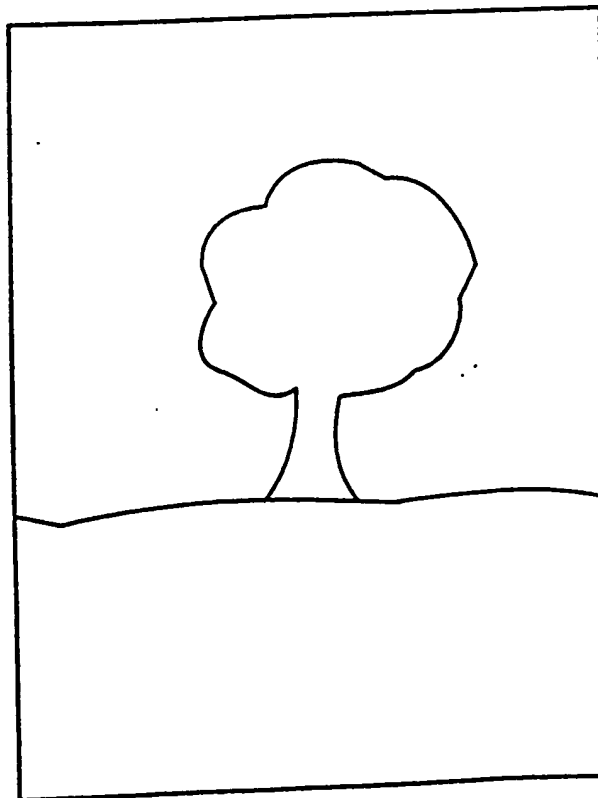


FIG. 1B

FIG. 2 is a block diagram of a system 110, according to one embodiment of the present invention. The system 110 includes an imaging device 114 and a computer 118. The imaging device 114 is connected to the computer 118 via a connection 116. A user 112 is shown interacting with the imaging device 114.

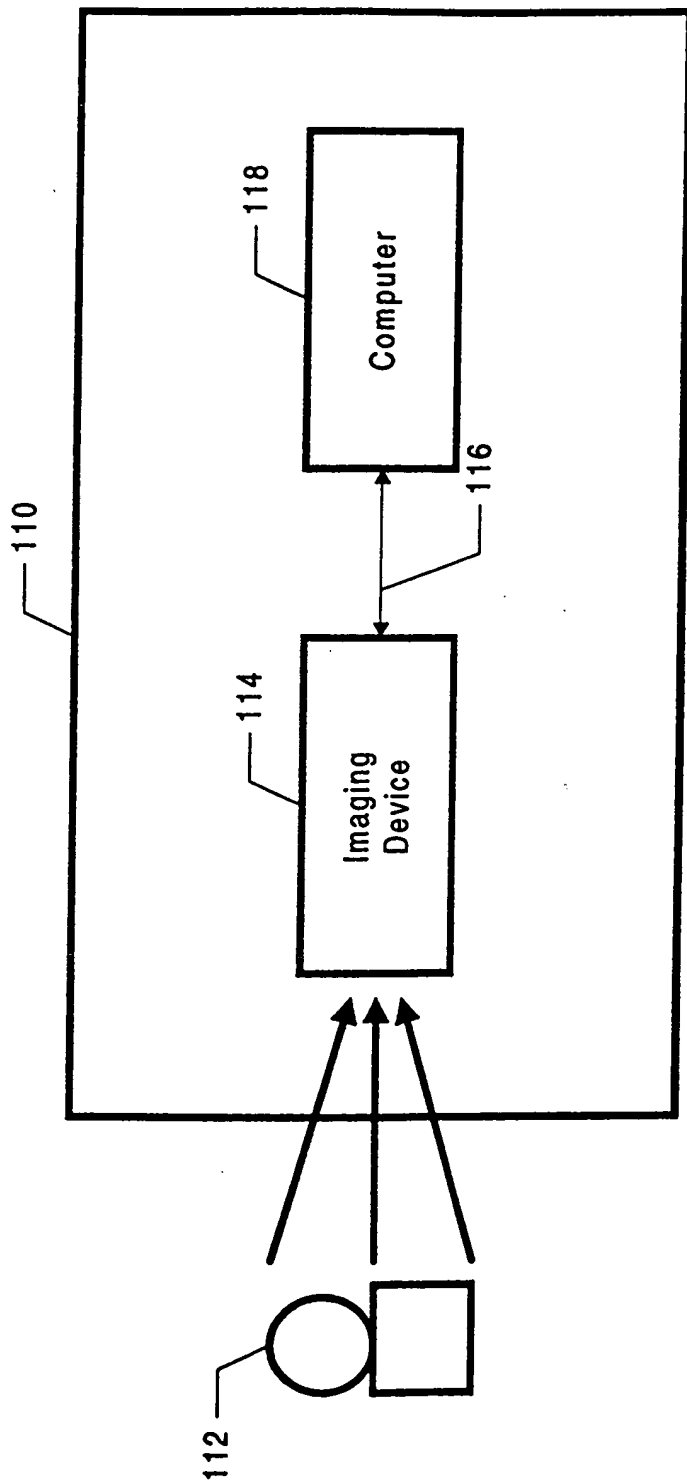


FIG. 2

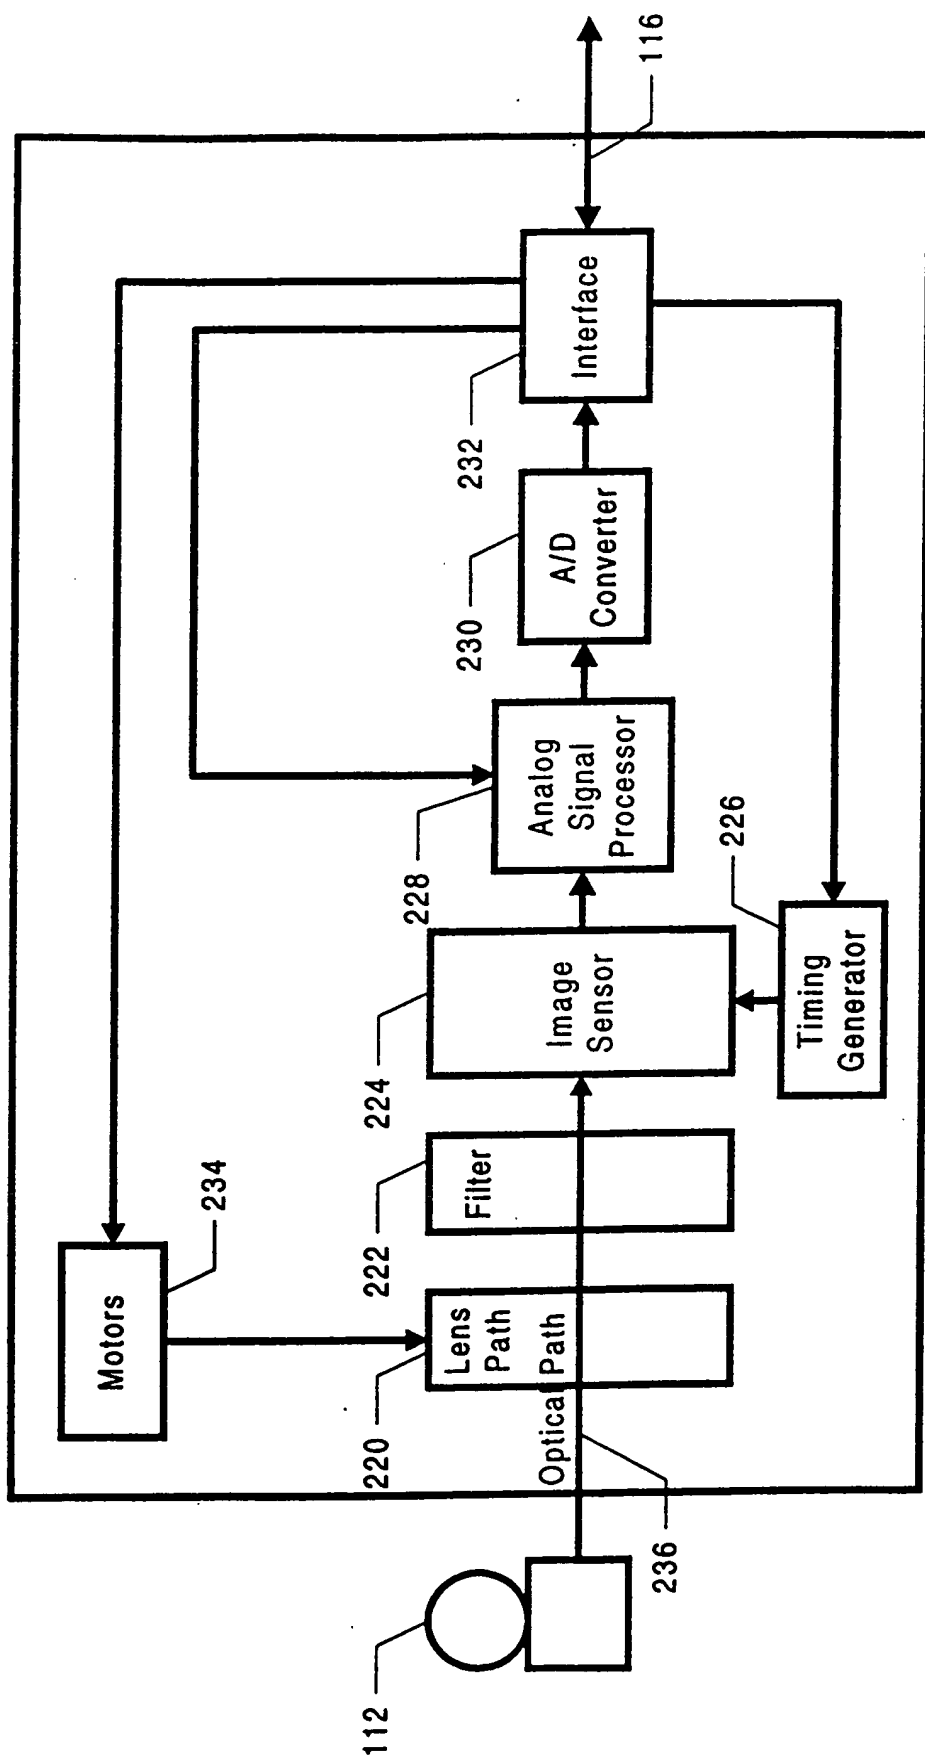


FIG. 3

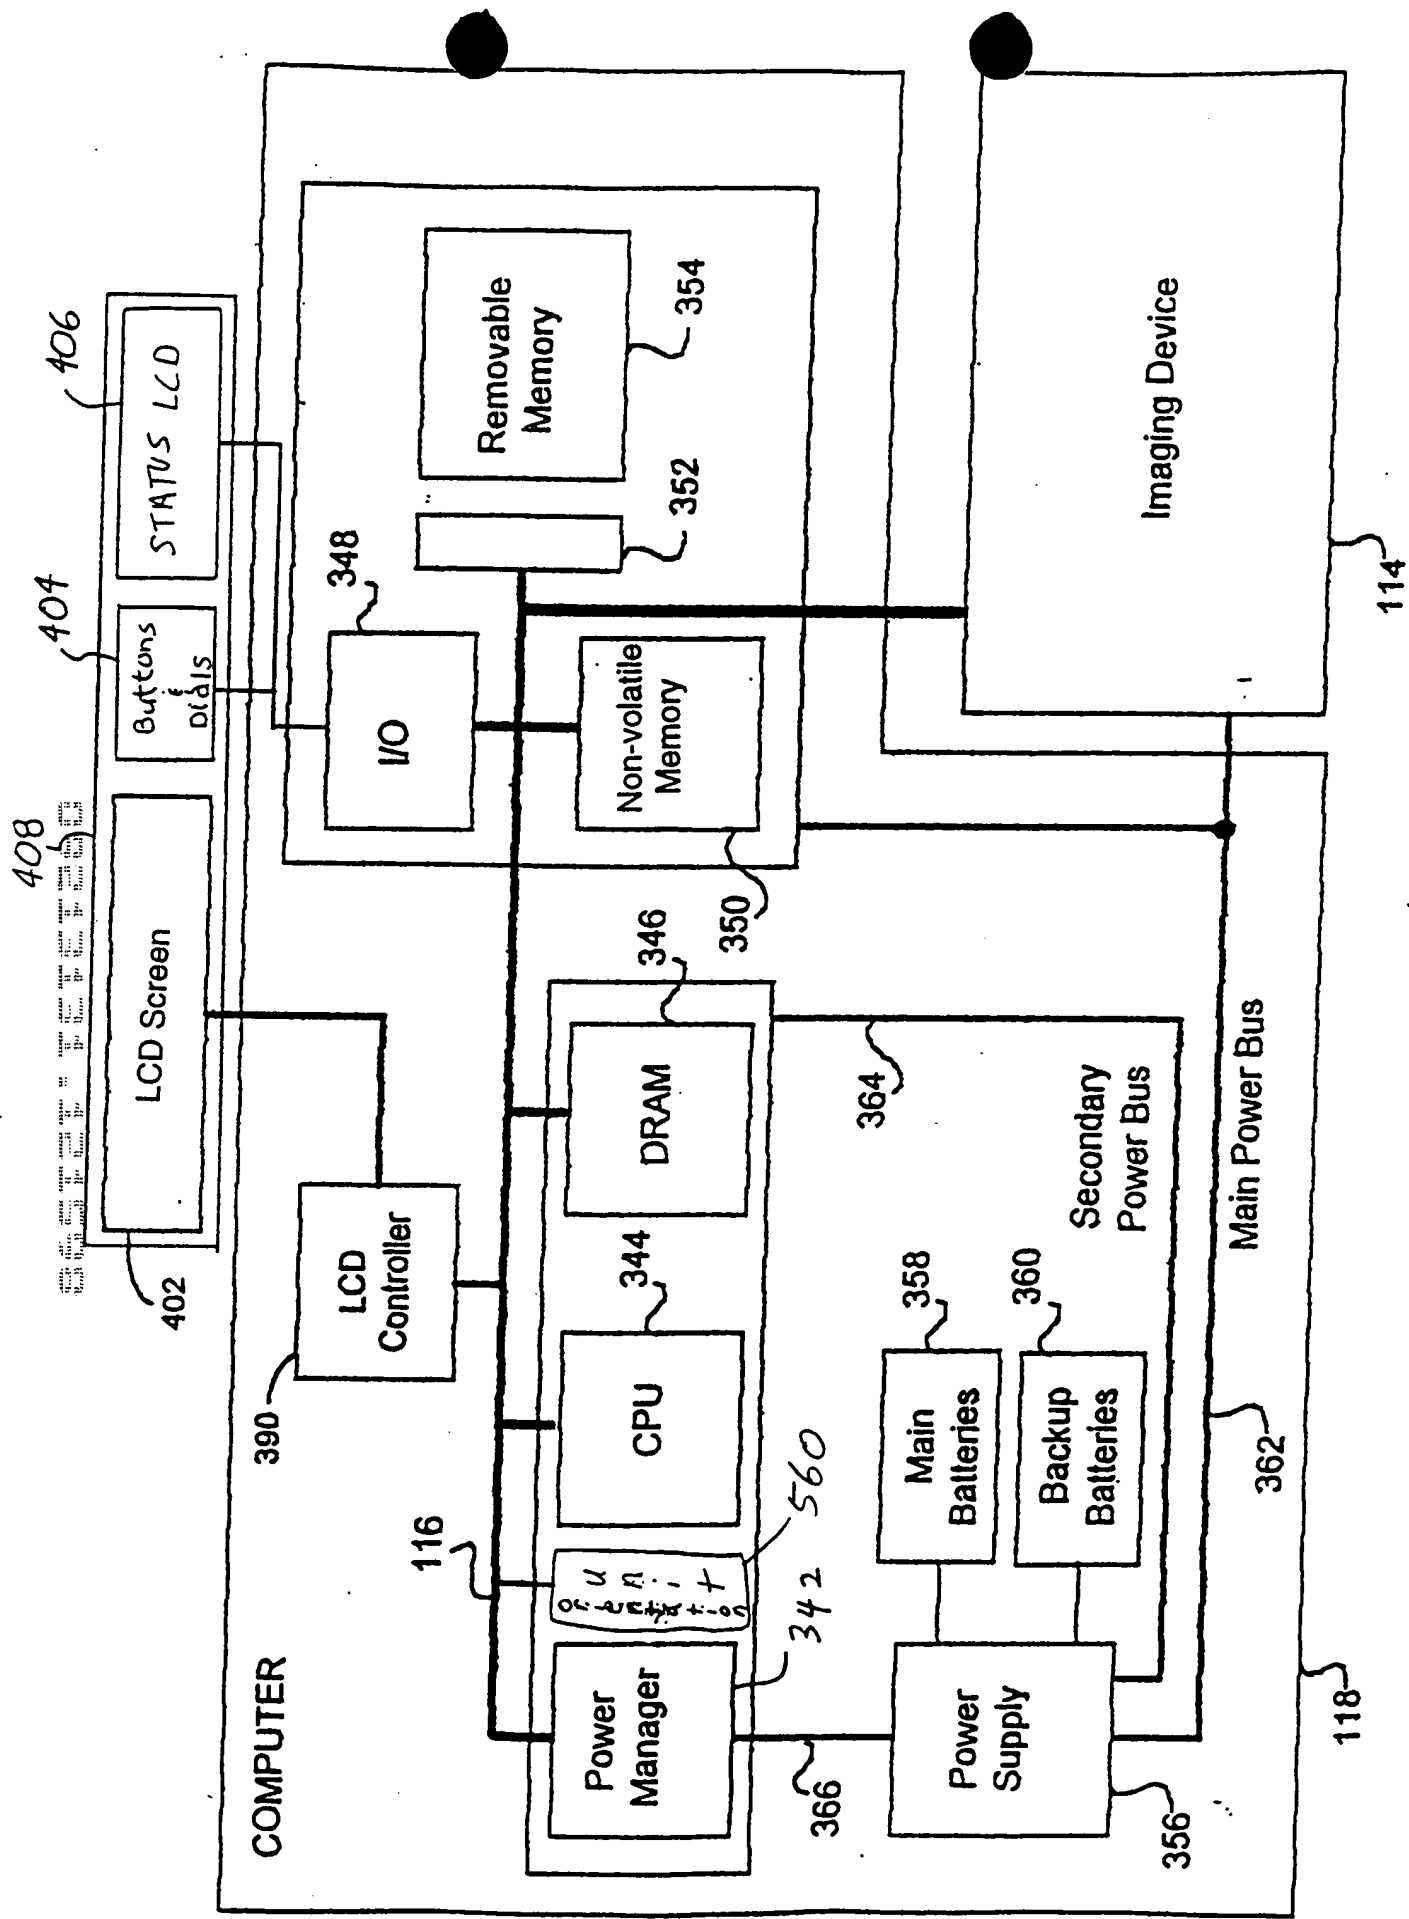


FIG. 4

346

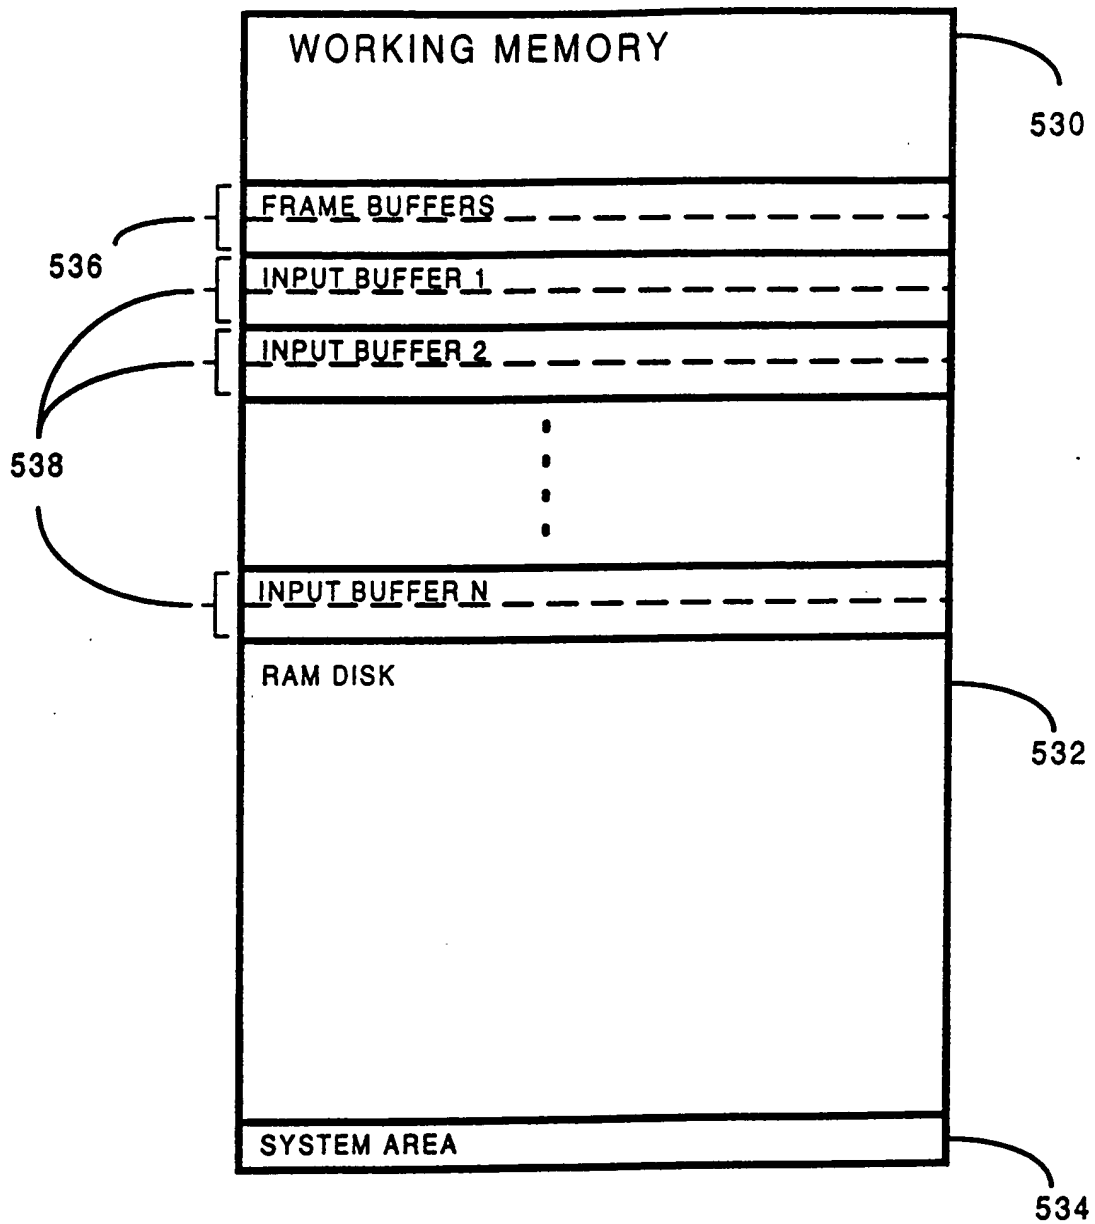


FIG. 5A

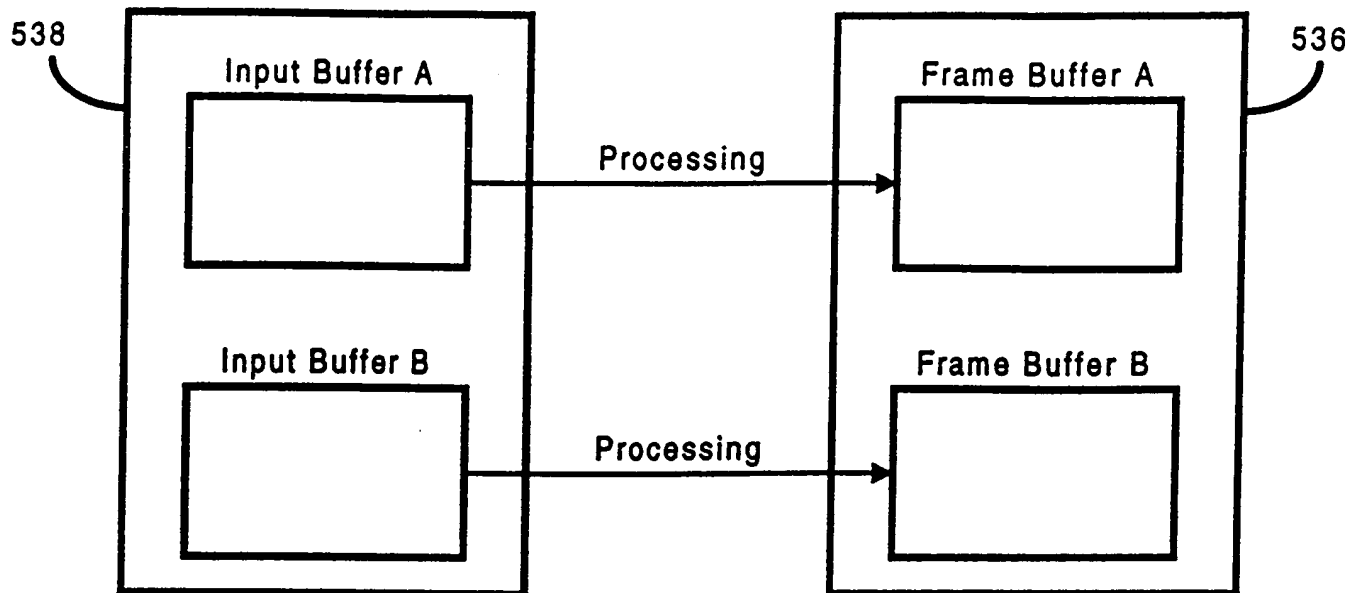


FIG. 5B

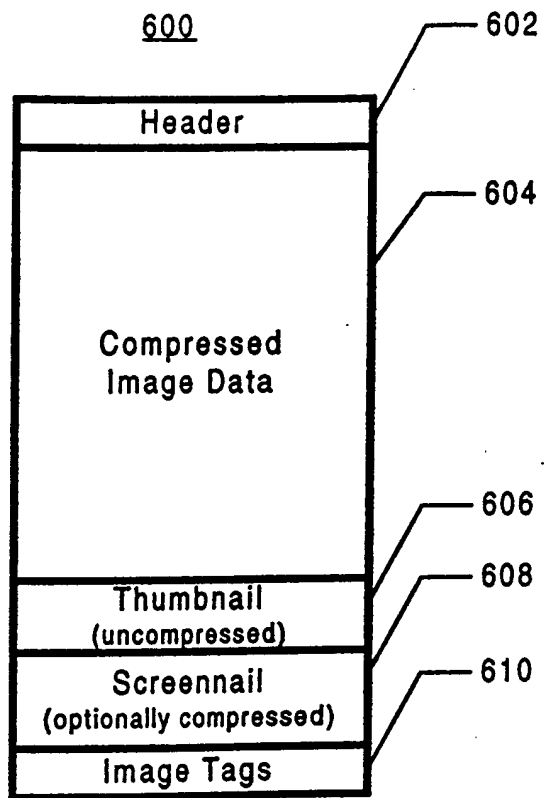


FIG. 6

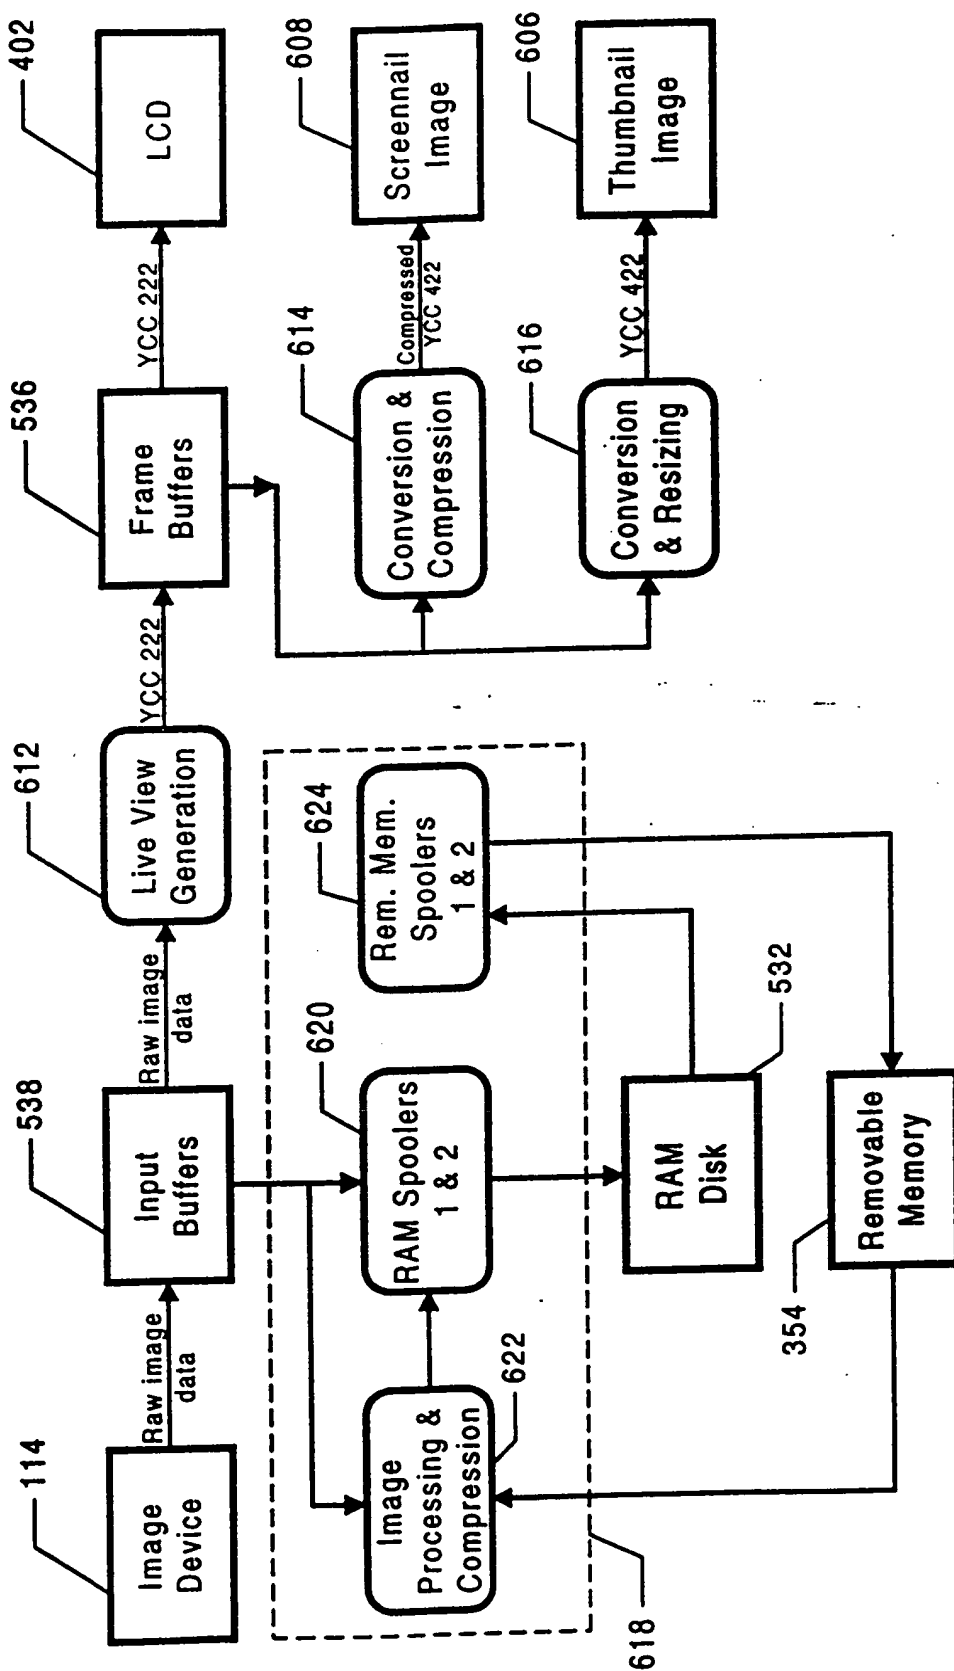


FIG. 7

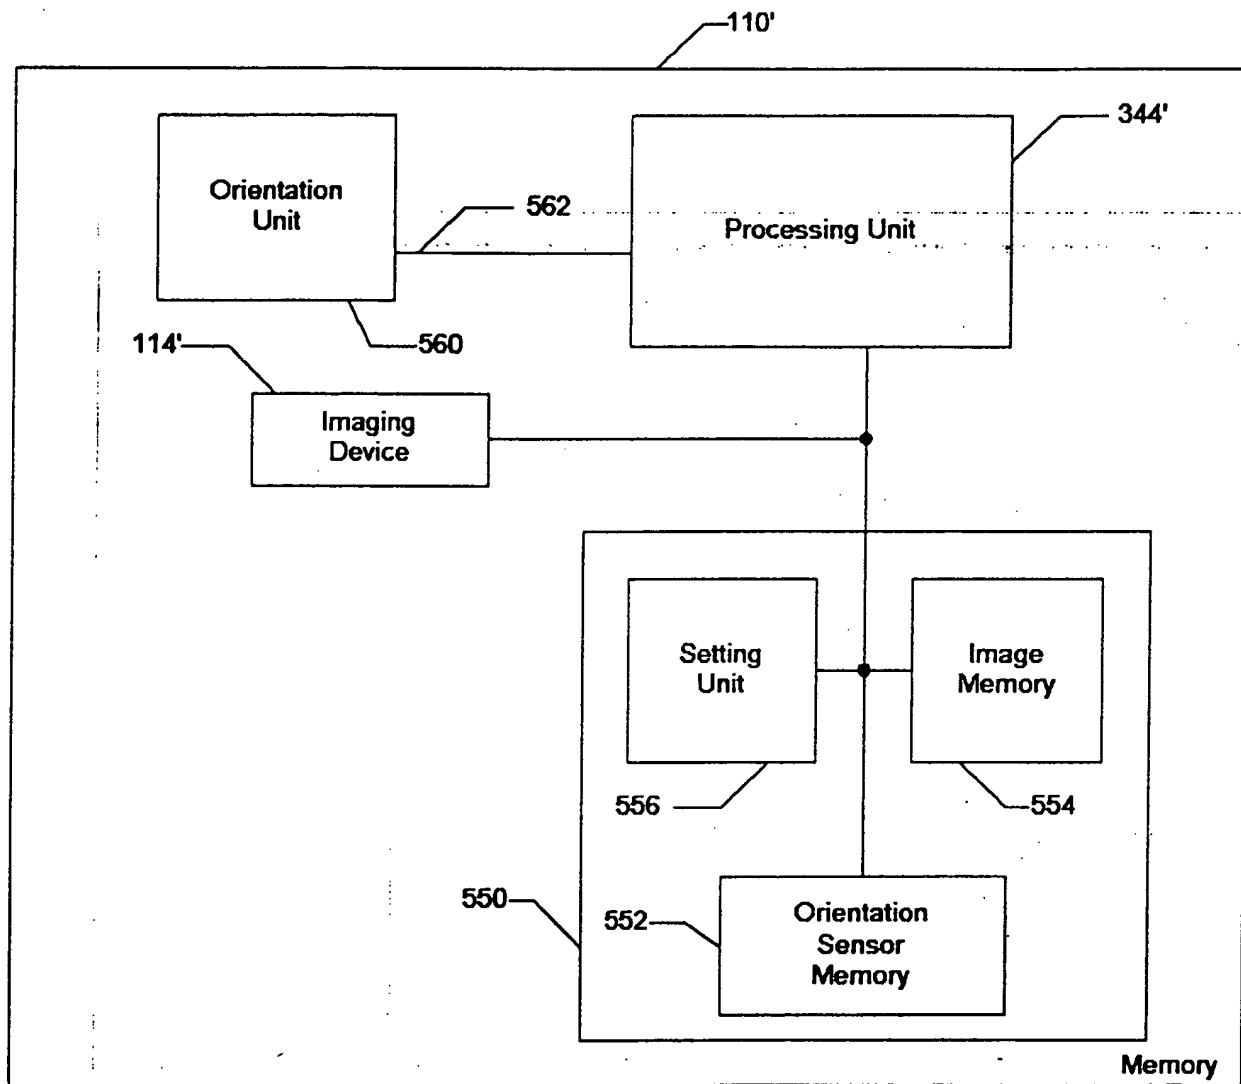
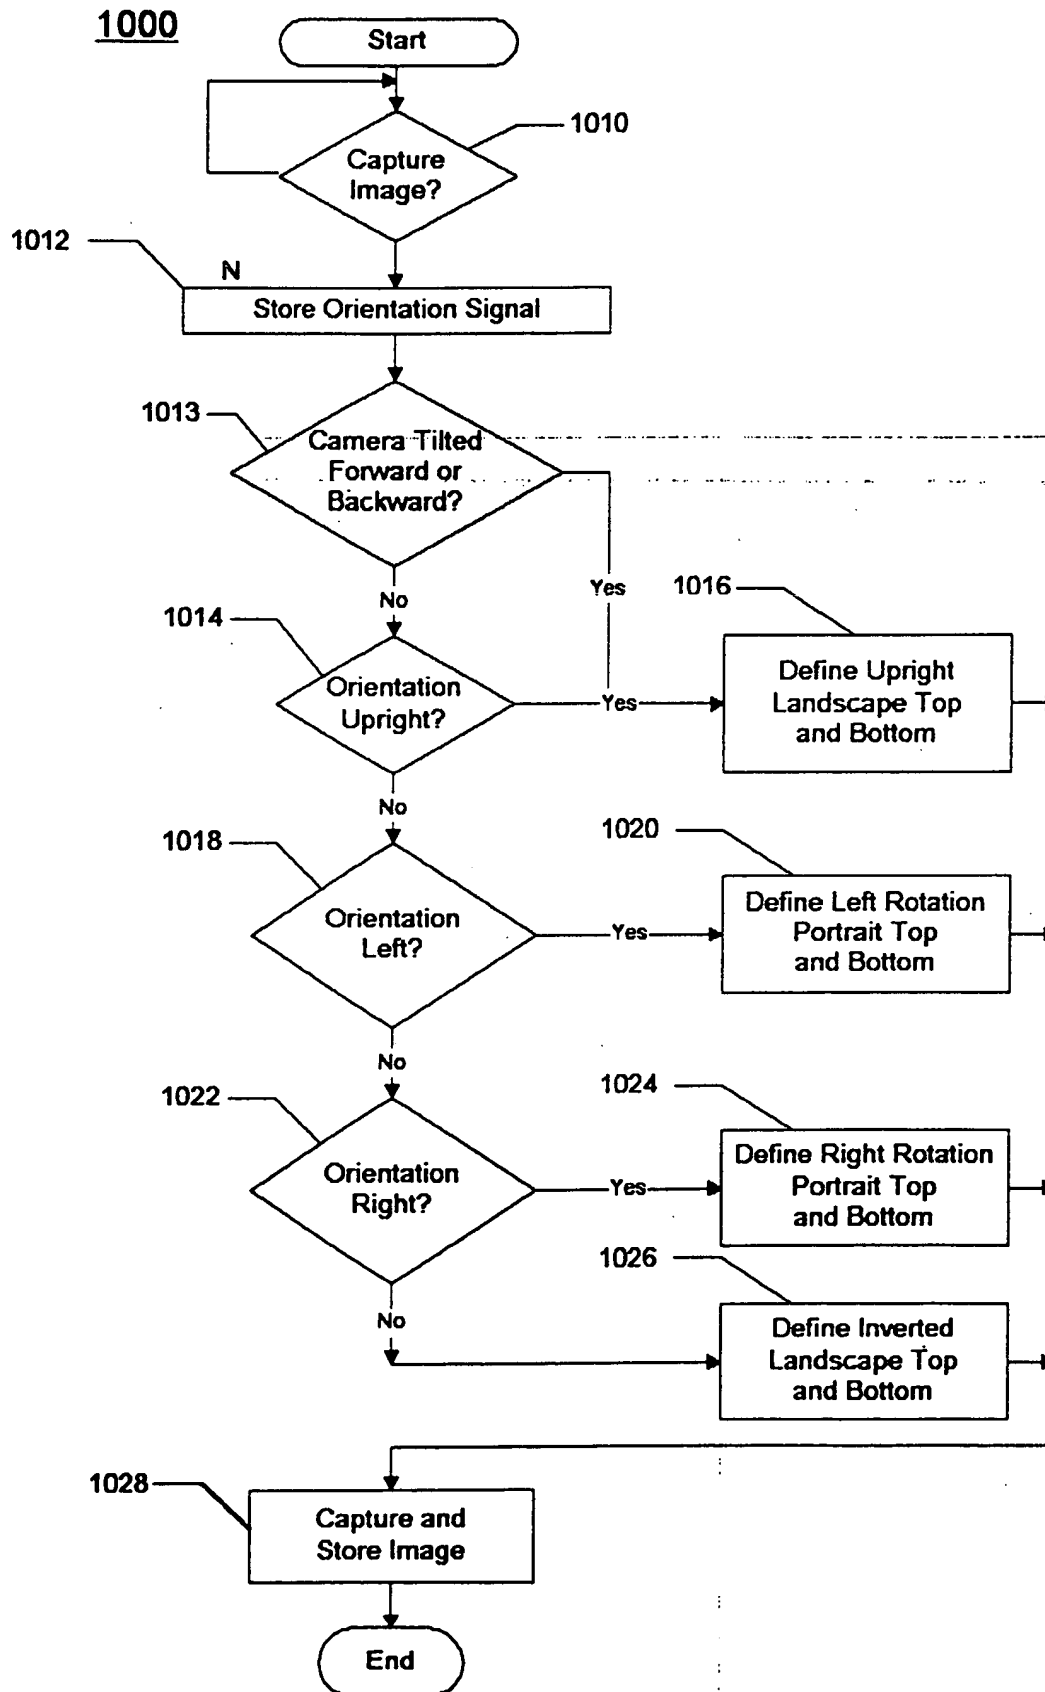


Figure 8



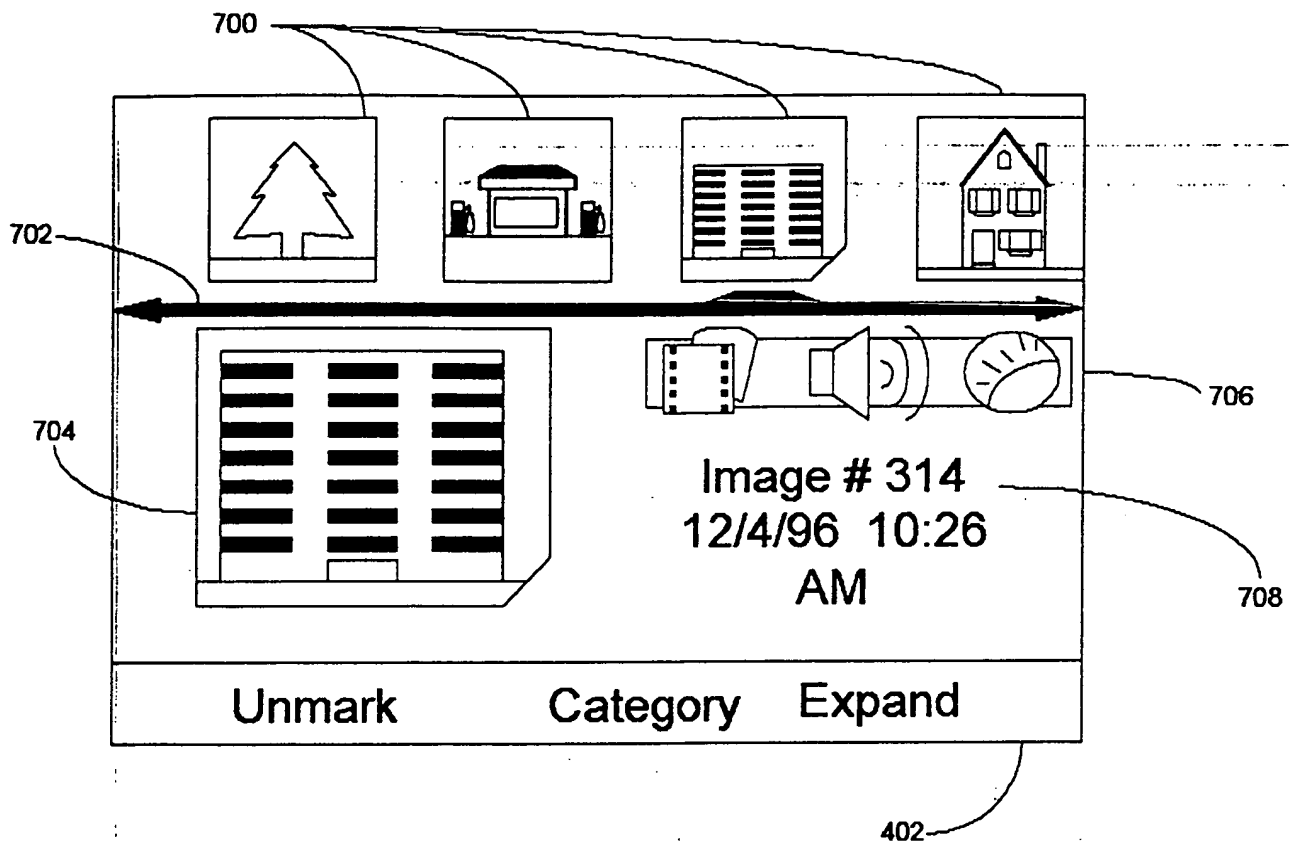


Figure 10

Figure 11

800

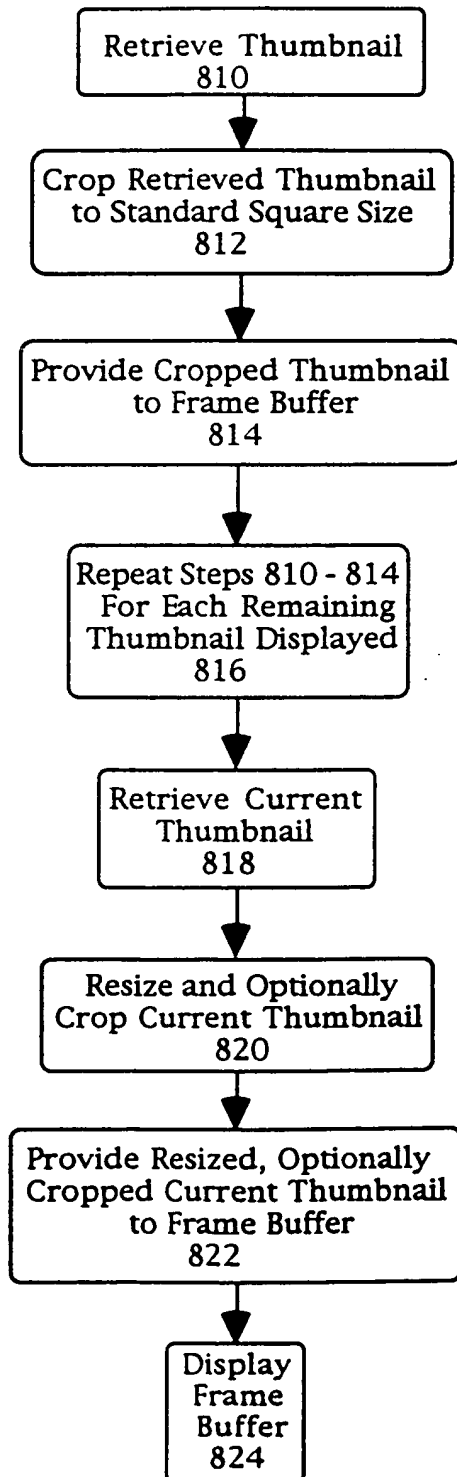


Figure 12

900

